

OTi DALI 15/220...240/1A0 LT2
 OPTOTRONIC Intelligent | – Dimmbar DALI

Dimmbereich: 1-100% - Dali oder Tuch DIM

Konstantstrom: 150-1050mA – Widerstand erforderlich für den richtigen Konstantstrom


V: 7.5 ... 54V

Max: 18W

Lxbxh: 95x53x30mm

Tc max = 75°C Info: Gerät darf nicht am Modul anliegen

OPTOTRONIC® Intelligent DALI (< 25 m cable length)

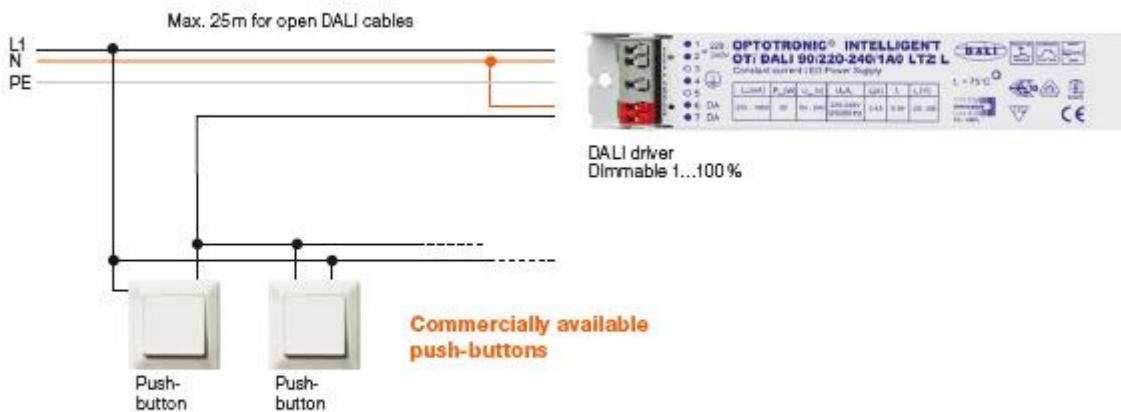

The total length of all wire connections must not exceed 25 m.
 For lengths of more than 25 m, please use a DALI repeater.

Foto Widerstand



Rset formula and standard lout values

$$I_{OUT [A]} = \frac{5V}{R_{set[\Omega]}} \times 1000$$

lout [mA] nominal	lout [mA] actual	Rset [kOhm] E48 series
350	357	14
500	500	10
700	699	7.15
1050	1078	4.64

Für weitere Technische Auskünfte wenden Sie sich bitte direkt an Osram

LED'S DO IT!